


Vacuum gauge

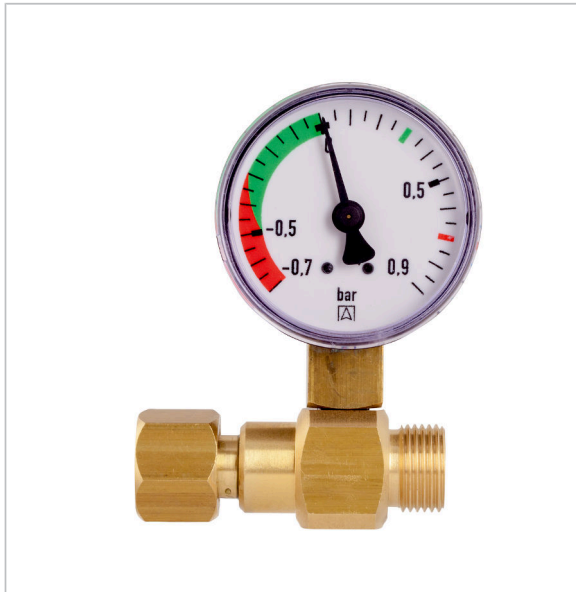

Application

For indication of the filter condition. Available for direct mounting to standard fuel oil filters. G $\frac{3}{8}$ union nut at filter end, G $\frac{3}{8}$ - male thread with sealing cone 60 ° at burner side for burner hose. Or with G $\frac{3}{8}$ - female thread x G $\frac{3}{8}$ - male thread for mounting to filter with G $\frac{3}{8}$ - female thread at tank end. Suitable for use in flood hazard areas. Watertight up to 10 m water column.

Versions

	Part no.
Vacuum gauge G $\frac{3}{8}$ with 60° cone -0.7/+0.9 bar	20400

Blue part no. = in-stock items