

Shut-off cocks for pressure gauges



Application

Shut-off element between pipe and pressure gauge. Stop cocks with test port allow you to connect both pressure gauges and testers to the pipe. Suitable for liquids, gases and vapour.

Technical specifications

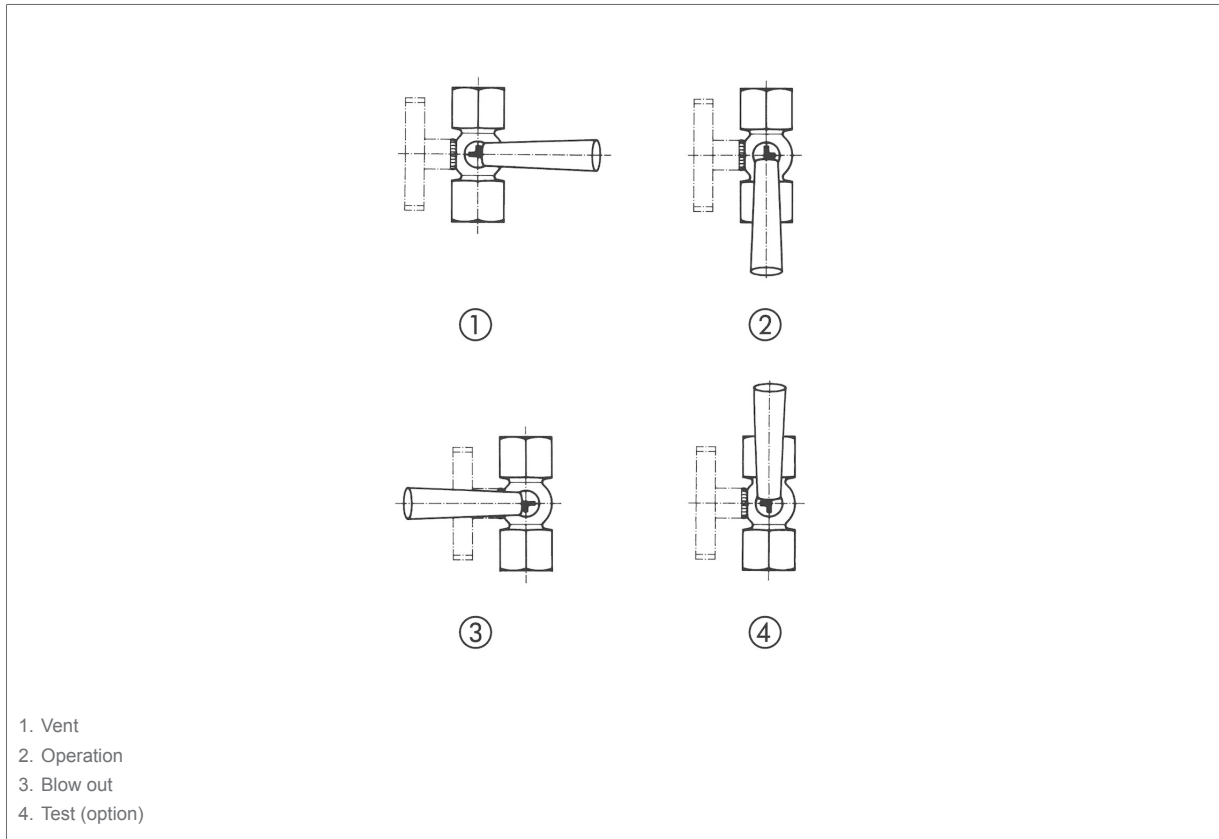
Operating temperature range
Medium: -10/+50 °C

Connection
See ordering table

Nominal pressure
PN 6 or PN 16


Material
Housing: Brass, bare metal surface or Stainless steel
316 Ti, bare metal surface
Tap: Brass, bare metal surface or Stainless steel
316 Ti, bare metal surface

Detail views



Versions

pressure gauge shut-off cock female x female

Connection	Nominal pressure	Material	Version	Part no.
G $\frac{1}{4}$	PN 6	Brass, bare metal surface	Female x female	63001
G $\frac{3}{8}$	PN 16	Brass, bare metal surface	Female x female	63002
 G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female x female	63003
	PN 16	Brass, bare metal surface	Female x female, with round test flange 40 x 5	63004
G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female x female, with test flange 60 x 25 x 10	63005
G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female x female, with sealing gland	63006

Blue part no. = in-stock items



pressure gauge shut-off cock female x male

	Connection	Nominal pressure	Material	Version	Part no.
	G $\frac{1}{4}$	PN 6	Brass, bare metal surface	Female x male	63011
	G $\frac{3}{8}$	PN 16	Brass, bare metal surface	Female x male	63012
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female x male	63013
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female x male, with round test flange 40 x 5	63009
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female x male, with test flange 60 x 25 x 10	63010


Blue part no. = in-stock items

pressure gauge shut-off cock female/female connection x male

	Connection	Nominal pressure	Material	Version	Part no.
	G $\frac{1}{4}$	PN 6	Brass, bare metal surface	Female/female connection x male	63014
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female/female connection x male	63027
	G $\frac{1}{2}$	PN 16	Stainless steel 316 Ti, bare metal surface	Female/female connection x male	63090
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female/female connection x male, with test flange 60 x 25 x 10	63028
	G $\frac{1}{2}$	PN 16	Stainless steel 316 Ti, bare metal surface	Female/female connection x male, with test flange 60 x 25 x 10	63091
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Female/female connection x male, with male test connection M20 x 1.5	63015
	G $\frac{1}{2}$	PN 16	Stainless steel 316 Ti, bare metal surface	Female/female connection x male, with male test connection M20 x 1.5	63016


Blue part no. = in-stock items

pressure gauge shut-off cock loose female x female

	Connection	Nominal pressure	Material	Version	Part no.
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Loose female x female	63017
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Loose female x female, with test flange 60 x 25 x 10	63018

Blue part no. = in-stock items

pressure gauge shut-off cock loose female x male

	Connection	Nominal pressure	Material	Version	Part no.
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Loose female x male	63107
	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	Loose female x male, with test flange 60 x 25 x 10	63024

Blue part no. = in-stock items